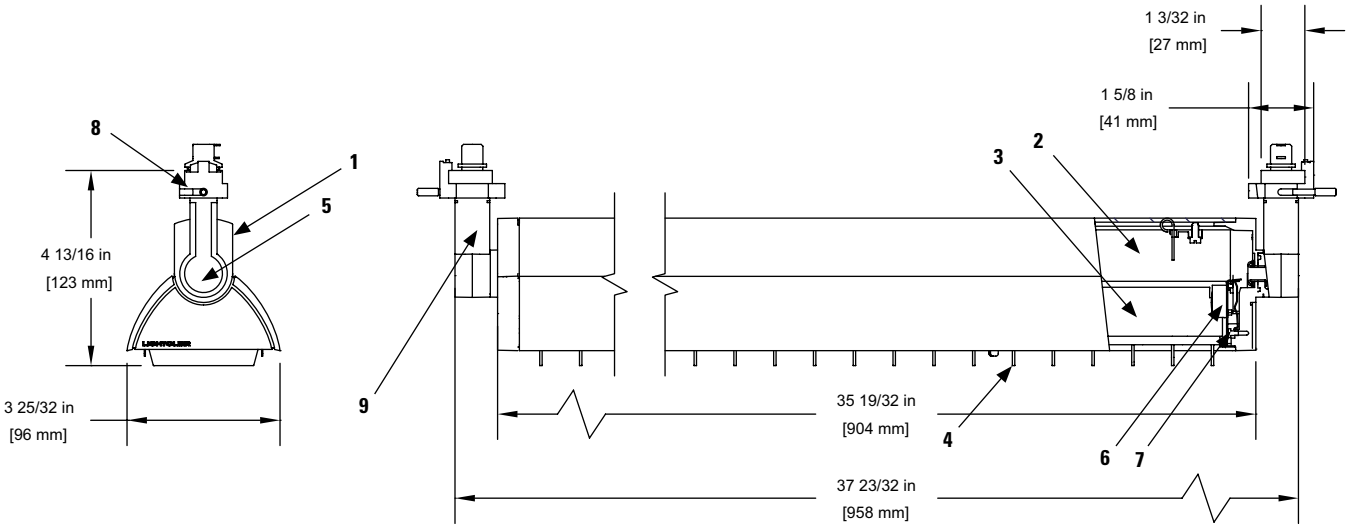

Ordering Information

Catalog No.	Finishes	Track Mountings	Lamp
37239WH	Matte White	ProSpec® 120V/277V track systems only.	2 x 39W T5 High Output (Fluorescent)
37239EBK	Matte Black	Not compatible with recessed track and MonoPoint.	

Features

1. **Ballast & Reflector Housing:** Aluminum with die-cast endcaps.
2. **Ballast:** 39w electronic.
3. **Flood Reflector:** Aluminum, with highly reflective and semispecular finish for a smooth wash of light.
4. **Louver:** Aluminum, for glare control, with captive locking springs for easy installation and removal.
5. **Vertical Pivot:** Die cast rotation housing with positive rotation stop provides 0° (NADIR) –130° vertical rotation in both directions.
6. **Sockets:** 600v rated mini bi pin sockets with 90° rotor lock to engage contacts and retain with a positive detent.
7. **Socket Bracket:** Adjustable steel, mounting bracket slides out for easy lamping.
8. **Attachment Fitting:** Molded polycarbonate; pin rotates fitting into track to engage luminaire.
9. **Track Adapter Arm:** Die-cast aluminum with integral polarity keyguard..

Electrical

Class P T5HO Universal Voltage Electronic Ballast

Input Voltage: 120V/277V
Power Factor: >98%
Input Power: 85W/83W (2 lamps)
Max Input Current: 0.76A @ 120V/0.32A @ 277V
Sound Rated: A
Minimum Start Temp: 0°F
Do Not Use on Dimming Circuit

Finish

All painted finishes are baked enamel.

Labels

UL, cUL

Advent® is a registered trademark of Lightolier.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1108

Lighting Data 2-39W T5 High Output

Footcandles on wall:

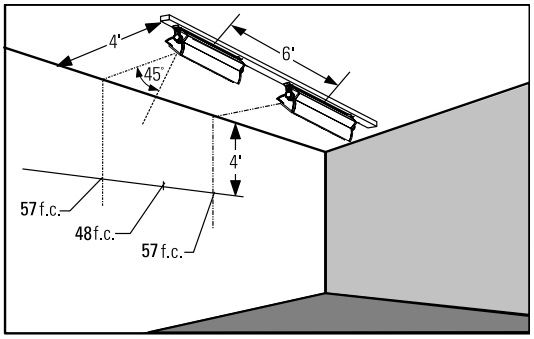

EXAMPLE: With track located 4' from wall and multiple units spaced 6' on center and aimed 45° from horizontal, the illumination on wall 4' from ceiling will be 57 f.c. beneath units and 48 f.c. between units.

Lamp Information:
2 X 39W T5 High Output
Mini Bi-Pin Fluorescent (9376)
1 x 39W T5 High Output
Mini Bi Pin Fluorescent (9377)

Two Lamps, without louver, aimed 45° up.



Two Lamps, with louver, aimed 45° down.



One Lamp, with louver, aimed 45° down.



Footcandles on Wall

Track 3 Feet From Wall



Distance From Ceiling	Single Unit 0'	1'	2'	3'	4'	5'	4' Multiple Units			5' Multiple Units			6' Multiple Units		
	Beam Center														
1'	157	132	76	36	17	9	196	166	196	178	114	178	170	77	170
2'	123	106	65	32	14	6	153	136	153	136	95	136	129	65	129
3'	78	69	47	27	13	6	107	100	107	91	74	91	84	54	84
4'	51	46	34	22	13	7	83	80	83	70	62	70	63	50	63
5'	30	27	21	15	9	6	50	49	50	41	38	41	35	30	36
6'	19	18	15	11	8	5	40	39	40	33	32	33	29	26	29
7'	12	12	10	8	6	4	27	27	27	22	21	22	19	18	19
8'	8	8	7	5	4	3	19	19	19	15	15	15	13	13	13
9'	6	6	5	4	3	3	16	16	16	13	13	13	11	11	11

Track 4 Feet From Wall



Distance From Ceiling	Single Unit 0'	1'	2'	3'	4'	5'	4' Multiple Units			5' Multiple Units			6' Multiple Units		
	Beam Center														
1'	87	75	48	24	10	3	105	97	105	92	69	92	87	48	87
2'	86	76	53	31	16	7	117	111	117	100	82	100	92	60	92
3'	65	58	43	27	15	8	96	93	96	80	70	80	71	53	71
4'	47	43	33	23	15	9	79	77	79	65	60	65	57	48	57
5'	34	32	26	19	13	9	66	64	66	54	51	54	47	42	47
6'	23	21	18	14	10	7	47	46	47	38	37	38	33	30	33
7'	16	15	13	10	8	6	35	35	35	29	28	29	25	23	25
8'	11	11	9	8	6	5	29	29	29	24	24	24	21	20	21
9'	8	8	7	6	5	4	22	22	22	18	18	18	16	15	16

Track 5 Feet From Wall



Distance From Ceiling	Single Unit 0'	1'	2'	3'	4'	5'	4' Multiple Units			5' Multiple Units			6' Multiple Units		
	Beam Center														
1'	61	55	41	27	16	10	99	96	99	83	74	83	74	58	74
2'	62	56	43	29	18	11	104	102	104	87	80	87	77	63	77
3'	55	51	40	28	18	12	101	99	101	84	79	84	75	64	75
4'	40	38	30	22	15	10	77	76	77	63	60	63	54	49	54
5'	31	29	24	18	13	9	63	62	63	51	49	51	44	41	44
6'	24	22	19	15	12	8	53	53	53	44	42	44	37	35	37
7'	18	17	15	12	10	7	43	43	43	36	35	36	31	29	31
8'	13	12	11	9	7	6	32	32	32	26	26	26	22	22	22
9'	10	9	8	7	6	5	27	27	27	22	22	22	19	19	19

Footcandles are average and rounded off and data for multiple units are based on a minimum of five units.

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1108